Dynamic Remote Microphone RM-02



RM-02

Overview


The RM–02 is an ideal remote paging microphone with push–to– talk control. It features a unidirectional dynamic microphone with a gooseneck. The microphone has a frequency range of 50Hz to 10kHz with an impedance of 600ohms and a sensitivity of –52db. The stand is of heavy diecast–zinc construction to provide stability and minimize noise caused by the operator touching the stand.

FEATURES


- S Unidirectional Moving Coil Dynamic Microphone
- Heavy die-casting zine construction base
- MIC ON/OFF Switch
- S Frequency response 50Hz \sim 10kHz
- Sensitivity -52dB±3dB (0dB=1V/Pa at 1KHz)
- \odot Impedance 600 Ω
- Constitution and Accessory Stand(RM–02), Microphone(MC–02)



POLAR PATTERN & FREQUENCY RESPONSES

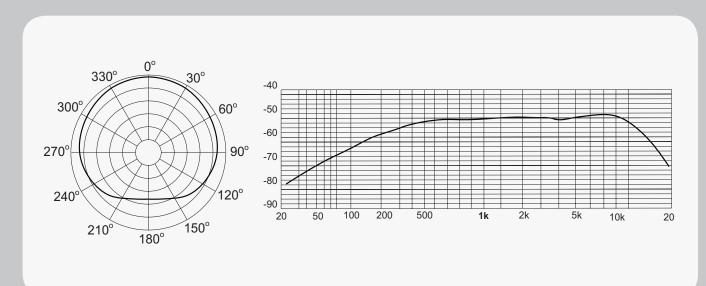

NAME OF GOOSE NECK ASS'Y

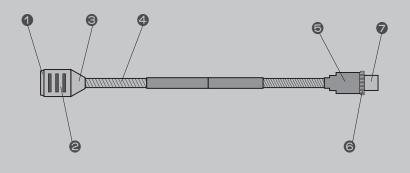

1 WIND SCREEN

2 UNIT

This unit which range is from 50Hz to 10kHz can make sound.

G UNIT BASE

This base settles unit, and made of aluminium ware to protect goose neck not to be lower.

4 GOOSE NECK

This goose neck can adjust the direct of unit without moving stand.

G CONNECTOR HOLDER

This case is in order to connect stand to connector.


6 WRENCH BOLT

This screw solidifies mounting between goose neck and connector holder.

⑦ 3P CONNECTOR

This screw solidifies mounting between goose neck and connector holder.

NAME OF STAND ASS'Y



1 RUBBER FOOT

This rubber foot of stand avoid sliding on the glass or table.

2 STAND

This stand made of heavy Zn diecasting which can minimize touch noise,

STAND COVER

6 RECEPTACLE

Input signal through 3p connector of goose neck becomes sound at this part of stand ass'y.

6 TALK SWITCH

After press talk switch, the microphone does work and press again is off.

SPECIFICATIONS

		RM-02
TYPE		Unidirectional
POLAR PATTERN		Moving Coil Dynamic
SENSITIVITY		−52dB±3dB (0dB=1V/Pa at 1KHz)
FREQUENCY RESPONSE		$50 { m Hz} \sim 10 { m kHz}$
MAX SPL		Over 130dB
IMPEDANCE		600Ω ±30%
WEIGHT (SET)		1.6kg / 3.5lb
DIMENSIONS(SET)	BASE	99(W) x 50(H) x 148(D)mm 3.9(W) x 2(H) x 5.8(D)in
	MIC	26.5(W) × 440(H) × 26.5(D)mm 1(W) × 17.3(H) × 1(D)in

Inter-M Corp. (IMK)



719, Dobong-ro, Dobong-gu, Seoul, Korea Overseas Sales Team Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com

* Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015.7.V1