

CEILING LOUDSPEAKERS
PC Low Impedance Ceiling Speakers

Low voltage ABS plastic coaxial ceiling loudspeakers.




PC 5X & PC 8X




These loudspeakers are used for low impedance systems only, as the speaker has no built-in transformer. The white plastic enclosure features a steel grill, with a moulded AMC logo and looks elegant and clean. They are best used for background music reproduction in bars, restaurants and hotel lobbies.




PC 5X

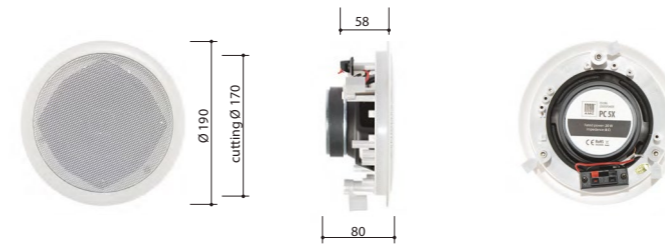




HORIZONTAL / VERTICAL POLAR DIAGRAMS

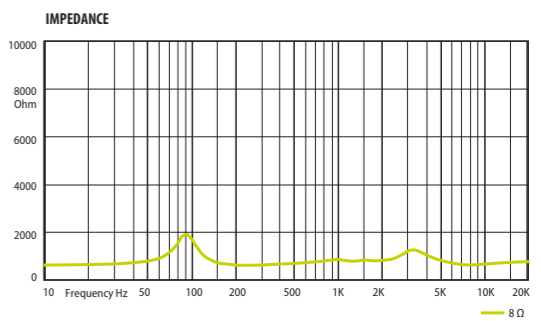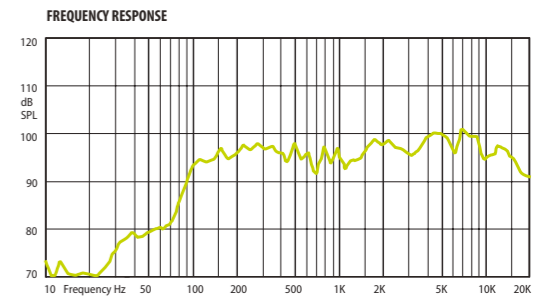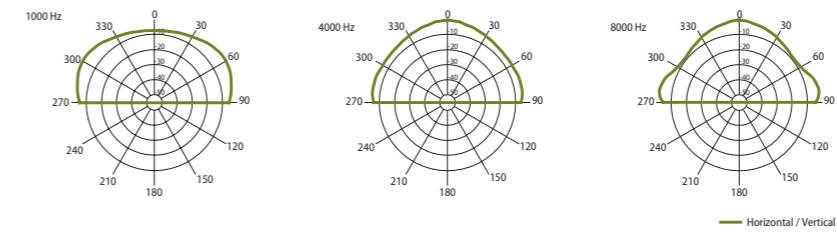

PC 8X

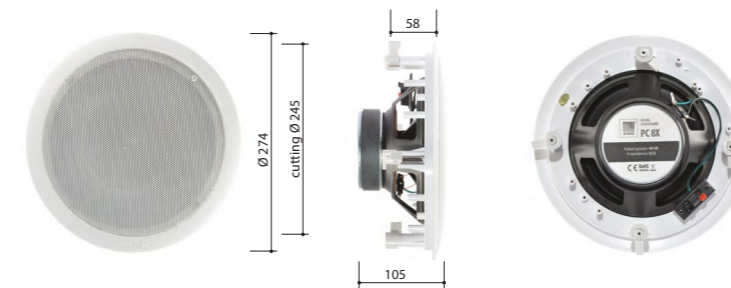

HORIZONTAL / VERTICAL POLAR DIAGRAMS

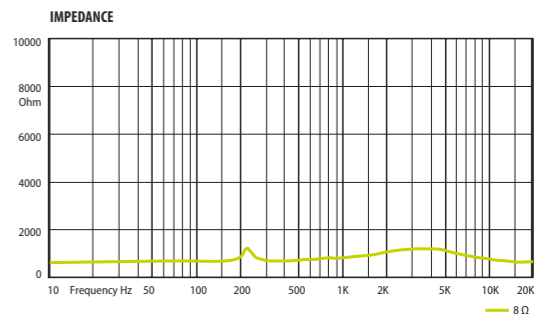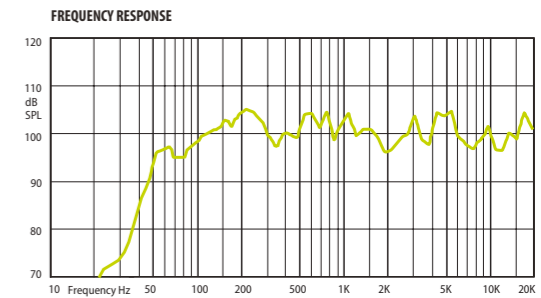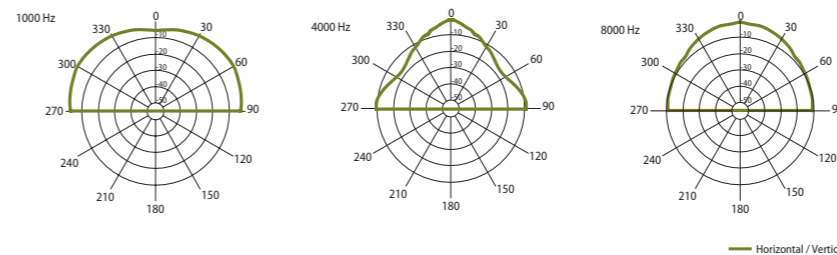

Technical Specifications	PC 5X	PC 8X
Rated power	20 W (8 Ω)	40 W (8 Ω)
Sensitivity	88 dB (1 W/1 m)	89 dB (1 W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 6816 Hz	105 dB (Pmax/1 m) at 6435 Hz
Frequency response	100 Hz – 20 kHz	50 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial	8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 190 mm × 80 mm	ø 274 mm × 105 mm
Weight	1 kg	1,83 kg
Material	Plastic, Steel grill	Plastic, Steel grill
Colour	White (RAL 9016)	White (RAL 9016)