

## DSP 416

## Wall Mounted Speaker System



### *Features*

- Fashion Design, Line Voltage 70/100V, Rated Power 25W
- Max SPL: 104±2dB
- Built-in 100v/70v transformer
- Wide Freq.Resp.:60Hz-20kHz
- High Sensitivity 90±2dB
- Made of high quality engineering plastic, long life, clear and sonorous sound

### *Description*

The DSP416 is a wall mounted speaker with a 70v/100v transformer built in. The 70v/100v transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.


This speaker is designed of wide frequency response (60-20,000Hz); it is made of high quality engineering plastic, with long-term durability, and will never be out of shape or fade; clear and sonorous sounds; 4 pcs of this speaker can be combined into a 360° dispersion speaker system fixed by a quadrangle bracket (optional)

It can be applied to different occasions vary in area sizes and background noises, such as station, park, school, square, military camp, industrial park, etc.


### *Specification*

MODEL	DSP416
Rated Power	25W
Line Voltage	70/100V
Max SPL(1M)	104±2dB
Sensitivity	90±2dB
Freq. Resp	60Hz-20kHz
Weight	3.2kg

### Hanging Hole



### Nail for Mount

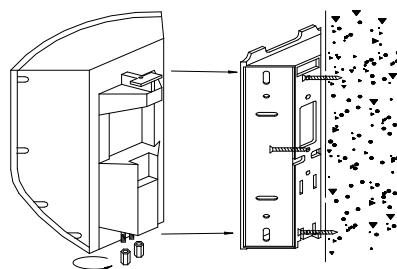

## Installation

1. Screw off the screw caps at the bottom, remove the bracket from the speaker box and fix it on the wall; Combine the speaker box with the bracket and screw tight with screw caps;
2. Connect audio broadcasting wire to the terminals according to the table below;

Power Terminals	Line Voltage	70V	100V
Red --- Blue		13W	25W
Red --- White		25W	N/A

3. Finally, adjust the direction of the speaker and examine whether it is steady.

### FREQ. RESPONSE

(dB SPL, 1W, 1m)



### DISTORTION

(THD < 1.5% 1W, 1m, 100Hz~10kHz)

